



ACHILLES

Inflatable Boats



2014



THE BEST NAME YOU CAN PUT ON AN INFLATABLE BOAT

Introducing the New LSI "E" Series!

- New CSM Fabric Floor provides even greater stiffness
- New Lateral Seam Design for a sleeker, modern look
- New webbed handles and helmsman grip

See page 7.



LSI-290E

Introducing the New SPD "E" Series!

- New Aluminum Floorboards for less maintenance and better durability
- New Lateral Seam Design for a sleeker, modern look
- New webbed handles and helmsman grip



See page 9.



SPD-290E

At Achilles, the process of providing boaters with the highest quality inflatable boats in the world begins with manufacturing our own industry-leading CSM fabric and ends with providing Achilles owners unsurpassed customer service.

The quality of Achilles CSM Fabric has such a great reputation in the inflatable industry that many other inflatable boat manufacturers around the world buy it from us to use on their boats. But we do not stop at producing our own tough, airtight fabric that is virtually impervious to the elements, oil, gasoline and abrasions. We take the extra time and expense to build in the finest safety and performance features other manufacturers do not, such as our exclusive 4-layer overlapped seam construction. We meticulously design all our boats to deliver unsurpassed performance while outfitting each one with a comprehensive array of quality standard features you will not find on other inflatables. When you compare the design and features of any Achilles boat with any competing model, you will understand why we own a well-deserved reputation for quality forged over the last 40 years.

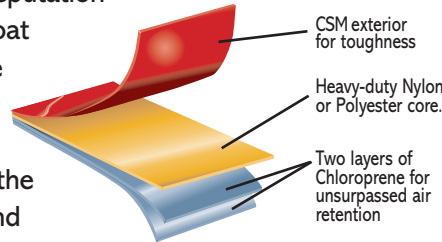

UNSURPASSED SEAM CONSTRUCTION

Our seams are overlapped a full inch and reinforced with seam tape both inside and out. No one else takes so many steps to ensure seams will last.

NON-CORROSIVE CHECK VALVES

All Achilles valves are non-corrosive with no moving parts that might break. They are engineered for easy "one-way" inflation and instant deflation.



With Achilles, quality doesn't stop with the sale. We provide both customers and dealers alike with comprehensive and responsive post-sales support in every aspect of Achilles ownership. Our customer-friendly web site not only offers comprehensive information on our current models, but also on all Achilles boats produced since 1978.

When you choose an Achilles, you will come away with a high quality inflatable boat and an ongoing relationship with a company committed to its customers.

ACHILLES WORK & RESCUE BOATS



Achilles produces heavy-duty workboats and rapid deployment rescue boats. Call or email us for our Commercial Boat catalog.


ACHILLES RIVERBOATS



Achilles produces a complete line of CSM riverboats and kayaks. Call or email us for our riverboat brochure.

A SMOOTH, SIMPLE OAR SYSTEM

We invented the fold-down, locking oar system that makes rowing a breeze while keeping oars secured and out of the way when not in use.



FULL FIVE-YEAR WARRANTY ON FABRIC AND SEAMS

We back our claim to having superior fabric and construction with a strong warranty commitment.



Achilles boats are certified by the National Marine Manufacturers Association as adhering to federal regulations and rigid industry standards established by the U.S. Coast Guard and the American Boat & Yacht Council. Achilles boats must pass rigorous annual inspections from independent third party inspectors to maintain this prestigious certification that guarantees our boats meet the highest safety and production standards. Achilles boats are also manufactured to meet or exceed ISO6185 standards.

DINGHY SERIES

PAGES 5-9

Great quality in compact packages that are easy to carry, store and inflate.



LT Series



LS-RU Series

LSI & SPD Models Redesigned for 2014

SPORT TENDERS

PAGES 5-9

A functional, versatile, sporty lineup offering a variety of floor and design options.



LEX Series



LSR Series



LSI Series



SPD Series

RIGID HULLS

PAGES 10-12

Choose from the industry's most complete lineup of open RIB's.



HB-FX Series



HB-LX Series



HB-DX Series

SPORT & UTILITY

PAGES 13-16

High performance inflatable boats for work, play and anything in between.



FRB Series



SGX Series



SG Series



SU Series

BOAT SPECIFICATIONS

PAGES 17-18

LT DINGHY SERIES

A lot of quality in a compact package. That describes our LT Series dinghies.



These two and four-person boats go from their handy carry bags to fully equipped dinghies in just minutes. Compact enough to be stored virtually anywhere, they are safe, durable and dependable dinghies capable of carrying substantial loads. They come ready to work with fold-down oar system, wood seat, fold-up floor and motor mount. Even though they are our most economical boats, they are made with the same durable Achilles CSM fabric and four-layer seam construction, and backed by the same five-year warranty as our large sport boats.



LT-4



LT-2



The LT-4 has a heavy-duty removable motor mount that fits quickly and securely into molded rubber mounting attachments.

LT

	LT-2	LT-4
Color	Lt. Gray	Lt. Gray
Length	7'3" (220 cm)	8'6" (260 cm)
Inside Length	5' (153 cm)	6'2" (188 cm)
Beam	4'1" (124 cm)	4'8" (142 cm)
Inside Beam	1'11" (58 cm)	2'2" (66 cm)
Tube Diameter	13" (33 cm)	15" (38 cm)
Weight	37 lbs (16.5 kg)	57 lbs (26 kg)
Load Capacity	640 lbs (290 kg)	970 lbs (440 kg)
Person Capacity	2	4*
Recommended H.P.	3 (2-3) Standard	3 (2-3) Standard
Maximum H.P.	3 Standard	3 Standard
Air Chambers	2	2

LT STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; wood/Achilles CSM roll-up floor (LT4); hinged wood floor (LT2); full-length rubbing strake; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; bow D-ring (LT2); towing bridle D-rings (LT4); life lines with hand loops; removable wood rowing seat; motor mount; foot pump; carry bag; and maintenance kit.

*See pages 17 and 18.

LS-RU ROLLUP TENDER SERIES

Value packed, roll-up option for boaters who need the space-saving convenience of a lightweight, easy-to-stow tender.



LS4-RU



LS4-RU

Both our LS-RU rollup tenders can be stowed in a space just 10" high. With a roll-up wood/Achilles CSM fabric floor and solid transom, they can be inflated and ready to go in minutes. When they are, they deliver surprisingly large load and person capacities. Easy to carry, easy to set up, easy to store – the LS-RU.



LS-RU

	LS2-RU	LS4-RU
Color	Lt. Gray/ Navy Blue	Lt. Gray/ Navy Blue
Length	7'6" (228 cm)	8'8" (265 cm)
Inside Length	5'1" (156 cm)	6'1" (185 cm)
Beam	4'4" (132 cm)	4'8" (142 cm)
Inside Beam	2' (62 cm)	2'2" (66 cm)
Tube Diameter	14" (35 cm)	15" (38 cm)
Weight	57 lbs (25.5 kg)	66 lbs (30 kg)
Load Capacity	620 lbs (280 kg)	840 lbs (380 kg)
Person Capacity	2	4*
Recommended H.P.	4 (2-4) Standard	4 (2-6) Standard
Maximum H.P.	4 Standard	6 Standard
Air Chambers	2	2

LS-RU STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; wood/CSM roll-up floor; full-length rubbing strake; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; protective motor clamp plate; removable wood rowing seat; bailer valve; life lines; towing bridle D-rings; foot pump; carry bag; and maintenance kit.

*See pages 17 and 18.



LEX SPORT TENDER SERIES

These timeless tenders still offer boaters the classic inflatable look and functionality that has made them so popular.



LEX-88



LEX-88

LEX boats represent the culmination of many subtle refinements over the years that have kept them technologically current while maintaining their traditional appearance. A sleek bow design and ample interior space come together in this classic tender. A teardrop rub strake deflects spray and improves protection from the inevitable collisions with docks and boat hulls.

Additional features include an adjustable range wood seat and a full sectional wood floor. They all add up to a solid, reliable tender that combines practicality and performance in an economical package.



LEX

	LEX-77	LEX-88	LEX-96
Color	Lt. Gray	Lt. Gray	Lt. Gray
Length	7'7" (230 cm)	8'8" (265 cm)	9'6" (290 cm)
Inside Length	4'11" (149 cm)	5'11" (180 cm)	6'9" (205 cm)
Beam	4'9" (144 cm)	4'9" (144 cm)	4'9" (144 cm)
Inside Beam	2'2" (66 cm)	2'2" (66 cm)	2'2" (66 cm)
Tube Diameter	15.5" (39 cm)	15.5" (39 cm)	15.5" (39 cm)
Weight	62 lbs (28 kg)	69 lbs (31 kg)	74 lbs (33.5 kg)
Load Capacity	730 lbs (330 kg)	900 lbs (410 kg)	990 lbs (450 kg)
Person Capacity	2	4*	4
Recommended H.P.	4 (2-4) Standard	4 (2-6) Standard	6 (4-8) Standard
Maximum H.P.	4 Standard	6 Standard	8 Standard
Air Chambers	2 & Keel	2 & Keel	2 & Keel

LEX STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four layer seam construction; air keel; wood floorboards; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; full-length teardrop rubbing strake; removable wood rowing seat; foot pump; towing bridle D-rings; protective transom motor clamp plate; life lines; bailer valve; carry bag; and maintenance kit.

*See pages 17 and 18.

LSR SPORT TENDER SERIES

The only inflatable tenders that truly combine the convenience of a roll-up floor with the rigidity and strength of floorboards.



LSR-290



LSR-290

Achilles has developed a unique aluminum floor that makes it a snap to quickly inflate or roll up these tenders. This unique floor design with an innovative hinge system makes this roll up floor stronger and firmer than others. This is combined with an inflatable keel and V-shaped fiberglass-encased transom to enhance performance. Large 17" tubes allow the LSR tenders to carry heavy loads. Add in the improved buoyancy, extra load capacity and smoother planing provided by the Performax end cone design, and you have a roll-up tender that is tough to beat.

Performax end cones perform better with today's heavier 4-stroke motors.

LSR

	LSR-290	LSR-310
Color	Lt. Gray	Lt. Gray
Length	9'6" (290 cm)	10'2" (310 cm)
Inside Length	6'9" (205 cm)	7'3" (220 cm)
Beam	5'2" (158 cm)	5'2" (158 cm)
Inside Beam	2'4" (72 cm)	2'4" (72 cm)
Tube Diameter	17" (43 cm)	17" (43 cm)
Weight	95 lbs (43 kg)	101 lbs (46 kg)
Load Capacity	1,210 lbs (550 kg)	1,300 lbs (590 kg)
Person Capacity	4	4
Recommended H.P.	6 (4-8) Standard	8 (4-10) Standard
Maximum H.P.	8 Standard	10 Standard
Air Chambers	2 & Keel	2 & Keel

LSR STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; air keel; aluminum roll-up floor; fiberglass encased v-shaped transom; full length teardrop rubbing strake; bow carry handle; interior bow lifting D-ring; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; towing bridle D-rings; life lines; removable wood rowing seat; extra seat attachment patches; rear carry handles; protective motor clamp plate; bailer valve; foot pump; carry bag; and maintenance kit.



LSI SPORT TENDER SERIES


The first inflatable tenders made with Achilles high pressure CSM-reinforced AirFirm™ floors have been redesigned for 2014 to look and perform better than ever!



The world's best high-pressure AirFirm™ floor tenders continue to lead the industry in innovation, styling and performance. For 2014 we have modified the tube design by incorporating a lateral closing seam for a sleeker, cleaner, more modern look. We have also modified the high pressure floors using an enhanced polyester core CSM fabric resulting in a stiffer floor.

The result is not only a more stylish tender, but also one that outperforms other air floor models by a wide margin. The combination of Performax tubes engineered to work efficiently with today's heavier 4-stroke motors, air keel, and a stiffer air floor result in a smoother handling and better performing boat. And the longer waterline resulting from Performax tubes allows these boats to plane even quicker and to stay on a plane at slower speeds.

Our Achilles high pressure, CSM drop-stitch AirFirm™ floors continue to provide the industry's toughest air decks. When you consider the abuse floors take from scrapes, the sun, salt water, oil and gasoline, it makes sense to have the toughest material available to protect them. And besides being durable, their unique construction consisting of thousands of polyester threads makes these floors remarkably rigid and incredibly lightweight as well.



Achilles high-pressure CSM drop-stitch AirFirm™ floors provide superior rigidity.

Performax end cones perform better with today's heavier 4-stroke motors.

LSI	LSI-230E	LSI-260E	LSI-290E	LSI-310E	LSI-330E	LSI-360E
Color	Lt. Gray	White or Lt. Gray	White or Lt. Gray	White or Lt. Gray	Lt. Gray	Lt. Gray
Length	7'7" (230 cm)	8'6" (260 cm)	9'6" (290 cm)	10'2" (310 cm)	10'8" (325 cm)	11'10" (360 cm)
Inside Length	5'1" (155 cm)	6'1" (185 cm)	6'9" (205 cm)	7'3" (220 cm)	7'5" (226 cm)	8'10" (268 cm)
Beam	4'9" (144 cm)	4'9" (144 cm)	5'2" (158 cm)	5'2" (158 cm)	5'6" (168 cm)	5'6" (168 cm)
Inside Beam	2'2" (66 cm)	2'2" (66 cm)	2'4" (72 cm)	2'4" (72 cm)	2'7" (78 cm)	2'7" (78 cm)
Tube Diameter	15.5" (39 cm)	15.5" (39 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)	18" (45 cm)
Weight	52 lbs (23.5 kg)	64 lbs (29 kg)	77 lbs (35 kg)	80 lbs (36.5 kg)	86 lbs (39 kg)	108 lbs (49 kg)
Load Capacity	710 lbs (320 kg)	820 lbs (370 kg)	1120 lbs (510 kg)	1210 lbs (550 kg)	1340 lbs (610 kg)	1520 lbs (690 kg)
Person Capacity	2	4*	4	4	5	6
Recommended H.P.	4 (2-4) Standard	4 (2-6) Standard	6 (4-8) Standard	8 (4-10) Standard	10 (4-15) Standard	20 (4-25) Standard
Maximum H.P.	4	6	8	10	15	25
Air Chambers	2 & Floor	2 & Keel & Floor	2 & Keel & Floor	3 & Keel & Floor	3 & Keel & Floor	4 & Keel & Floor

LSI STANDARD FEATURES INCLUDE: Achilles CSM-reinforced fabric; four-layer seam construction; removable Achilles CSM high-pressure drop stitch air floor; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; full length teardrop rubbing strake; bow carry handle and towing D-rings; interior bow lifting D-ring (except LSI-230E); removable wood rowing seat; high volume/high pressure foot pump with pressure gauge; protective pad for gas tank; fiberglass encased v-shaped transom; air keel (except LSI-230E which has a painted wood transom and no keel); extra seat attachment patches on LSI-290E, LSI-310E, LSI-330E and LSI-360E; carry bag; and maintenance kit. LSI-230E, LSI-260E, LSI-290E, and LSI-310E have stern mounted strap lift and carry handles. The LSI-330E and LSI-360E have rear molded lift and carry handles. All models have a fabric helmsman grip except the LSI-360 which has a molded rubber helmsman grip.

*See pages 17 and 18.

Redesigned for 2014!



Other features such as an inflatable keel that enhances performance, a durable fiberglass-encased transom**, and large tube diameters for better load capacity add to the overall quality and value of LSI boats. No other manufacturer offers more quality or more choices in an air floor inflatable boat.



LSI-290E



LSI-290E



Extra Seat Attachment Patches are Standard on LSI-290E, 310E, 330E and 360E.



LSI-260E



LSI-260E



**LSI-230 has no air keel and a painted wood transom.

SPD SPORT TENDER SERIES

Redesigned for 2014!

These solid sport tenders have been a staple in the Achilles lineup for over 30 years and now they are even better!



SPD-290E



SPD-290E

We have never stopped making our SPD boats better which is why they have remained popular with boaters for so long. That commitment to innovation and improvement continues in 2014 with tube and floor design enhancements. New lateral seam tube construction gives these classic inflatables a more modern, stylish design. Rope lifelines have been replaced with webbed handles and helmsman grip for a cleaner appearance. The three rear floorboards that bear the brunt of abuse are now aluminum to decrease maintenance and increase durability.

The classic features that make these boats so desirable remain such as large diameter tubes for greater load capacity and better performance, a removable wood rowing seat and an air keel/ floor joint system that deliver a more rigid floor.

Performax end cones perform better with today's heavier 4-stroke motors.



SPD

	SPD-290E	SPD-310E	SPD-330E
Color	Lt. Gray	Lt. Gray	Lt. Gray
Length	9'6" (290 cm)	10'2" (310 cm)	10'8" (325 cm)
Inside Length	6'9" (205 cm)	7'3" (220 cm)	7'5" (226 cm)
Beam	5'2" (158 cm)	5'2" (158 cm)	5'6" (168 cm)
Inside Beam	2'4" (72 cm)	2'4" (72 cm)	2'7" (78 cm)
Tube Diameter	17" (43 cm)	17" (43 cm)	18" (45 cm)
Weight	106 lbs (48 kg)	110 lbs (50 kg)	120 lbs (54.5 kg)
Load Capacity	1100 lbs (500 kg)	1190 lbs (540 kg)	1300 lbs (590 kg)
Person Capacity	4	4	5
Recommended H.P.	6 (4-8) Standard	8 (4-10) Standard	15 (4-15) Standard
Maximum H.P.	8 Standard	10 Standard	20 Standard
Air Chambers	2 & Keel	3 & Keel & Floor	3 & Keel

SPD STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; aluminum and wood floorboards; aluminum stringers and floorboard joints; air keel; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; bow handle and towing D-rings; interior bow lifting D-ring; removable wood rowing seat with foam mat; stern mounted strap lift and carry handles and a webbed helmsman grip; extra seat attachment patches; full length teardrop rubbing strake; fiberglass coated v-shaped transom; foot pump; carry bag (2 bags for the SPD-330E); and maintenance kit.

HB-FX RIGID HULL SERIES

An innovative folding transom makes these lightweight RIB's the easiest to transport, carry, and launch



HB-300FX



HB-270FX

The Achilles HB-FX boats feature a unique folding transom, lightweight design, and full-length padded carry bag that combine to make these rigid hull models the easiest to transport and launch. Despite their lighter weight, both these popular FX models offer large load capacities and the ability to carry four people. The Achilles HB-FX series offers boaters the most convenient RIB's available.

HB-FX

	HB-270FX	HB-300FX
Color	Pearl Gray	Pearl Gray
Length	8'10" (270 cm)	9'10" (300 cm)
Inside Length	5'11" (180 cm)	6'9" (205 cm)
Beam	5'1" (156 cm)	5'4" (162 cm)
Inside Beam	2'3" (70 cm)	2'4" (72 cm)
Tube Diameter	17" (43 cm)	18" (45 cm)
Weight	86 lbs (39 kg)	91 lbs (41.5 kg)
Load Capacity	1010 lbs (460 kg)	1260 lbs (570 kg)
Person Capacity	4	4
Recommended H.P.	6 (4-8) Standard	8 (4-10) Standard
Maximum H.P.	8 Standard	10 Standard
Air Chambers	3	3



Easy to fold and store



Deluxe padded carry bag is standard.



HB-FX STANDARD FEATURES INCLUDE: Pearl Gray Achilles CSM reinforced fabric; four-layer seam construction; modified "V" fiberglass hull; folding fiberglass transom; deluxe padded full length carry bag; full length teardrop rubbing strake; D-rings for towing bridle; stainless steel bow eye; inside bow davit lifting eye; bow and stern carry handles; grab handles; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; interior oar straps (HB-300FX only); gas tank tie down hardware; protective transom motor clamp plate; removable wood rowing seat; extra seat attachment patches (HB-300FX only); foot pump; and maintenance kit.

HB-LX RIGID HULL SERIES

Our lightweight series rigid hull line is still packed with high performance features.



HB-280LX

The Achilles HB-LX boats provide the critically acclaimed performance of the Achilles DX deep “V” fiberglass hull design in a lighter RIB. They also have the same tube design as the DX series, yet a modification of the deck design and removing the bow locker results in a RIB that is on average 20% lighter than the same size DX model.



This means they can perform well with smaller engines and can be carried or transported more easily. Despite their lighter weight and lower cost

compared to the HB-DX series, they are still loaded with all the high quality standard features for which Achilles is known.



HB-240LX



HB-350LX

HB-LX

	HB-240LX	HB-280LX	HB-315LX	HB-350LX
Color	Pearl Gray	Pearl Gray	Pearl Gray	Pearl Gray
Length	7'10" (240 cm)	9'2" (280 cm)	10'4" (315 cm)	11'6" (350 cm)
Inside Length	5'8" (172 cm)	6'7" (201 cm)	7'9" (235 cm)	8'8" (264 cm)
Beam	5' (153 cm)	5'5" (166 cm)	5'5" (166 cm)	5'9" (175 cm)
Inside Beam	2'5" (73 cm)	2'7" (80 cm)	2'7" (80 cm)	2'9" (85 cm)
Tube Diameter	16" (40 cm)	17" (43 cm)	17" (43 cm)	18" (45 cm)
Weight	86 lbs (39 kg)	118 lbs (53.5 kg)	128 lbs (58 kg)	161 lbs (73 kg)
Load Capacity	900 lbs (410 kg)	1210 lbs (550 kg)	1,320 lbs (600 kg)	1,680 lbs (760 kg)
Person Capacity	3	4	5	6
Recommended H.P.	5 (2-5) Standard	8 (4-10) Standard	10 (4-15) Standard	15 (6-20) Standard
Maximum H.P.	5 Standard	10 Standard	15 Standard	20 Standard
Air Chambers	2	3	3	3

HB-LX STANDARD FEATURES INCLUDE: Pearl Gray Achilles CSM reinforced fabric; four-layer seam construction; deep “V” fiberglass hull; full length teardrop rubbing strake; removable wood rowing seat; D-rings for towing bridle; stainless bow eye; lifting hardware for davits; grab handles; bow and stern carry handles; interior oar straps (except HB240-LX); fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; gas tank tie down hardware; protective transom motor clamp plate; extra seat attachment patches (except HB240-LX); foot pump; and maintenance kit.

HB-DX RIGID HULL SERIES

These deluxe hard bottom inflatables offer boaters the best combination of style, performance, and functionality.



Sleek, Euro-style tubes give them a stylish edge over other RIB's. A deep "V" fiberglass hull delivers superior performance while a built-in bow locker provides both a seat and a place for gear. If you want to take a step above the norm in a hard-bottomed tender, step up to an Achilles HB-DX RIB. Like every Achilles boat they are made with our own Achilles CSM fabric so they can handle the burning sun of the tropics or cold northern waters without fading or deteriorating. Choose a rigid-hulled inflatable that gives you a little extra. Choose an Achilles HB-DX.



HB-280DX



A deep "V" fiberglass hull takes Achilles RIBs to an even higher level of performance.



HB-350DX



HB-DX

	HB-280DX	HB-315DX	HB-350DX	HB-385DX
Color	Pearl Gray	Pearl Gray	Pearl Gray	Pearl Gray
Length	9'2" (280 cm)	10'4" (315 cm)	11'6" (350 cm)	12'8" (385 cm)
Inside Length	6'7" (201 cm)	7'9" (235 cm)	8'8" (264 cm)	9'10" (300 cm)
Beam	5'5" (166 cm)	5'5" (166 cm)	5'9" (175 cm)	5'11" (180 cm)
Inside Beam	2'7" (80 cm)	2'7" (80 cm)	2'9" (85 cm)	2'11" (90 cm)
Tube Diameter	17" (43 cm)	17" (43 cm)	18" (45 cm)	18" (45 cm)
Weight	148 lbs (67 kg)	159 lbs (72 kg)	187 lbs (85 kg)	243 lbs (110 kg)
Load Capacity	1190 lbs (540 kg)	1300 lbs (590 kg)	1650 lbs (750 kg)	1790 lbs (810 kg)
Person Capacity	4	5	6	7
Recommended H.P.	10 (4-15) Standard	15 (6-20) Standard	20 (6-30) Long	30 (20-40) Long
Maximum H.P.	15 Standard*	20 Standard	30 Long	40 Long
Air Chambers	3	3	3	4

HB-DX STANDARD FEATURES INCLUDE: Pearl Gray Achilles CSM reinforced fabric; four-layer seam construction; deep "V" fiberglass hull; bow locker; double heavy duty full length teardrop rubbing strake; extra seat attachment patches; helmsman grip; removable wood rowing seat; D-rings for towing bridle; stainless bow eye; lifting hardware for davits; lift and carry handles; grab handles; interior oar straps; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders (HB-385DX has paddle); gas tank tie down hardware; protective transom motor clamp plate; foot pump; and maintenance kit.

*See pages 17 and 18.



HB-385DX

FRB SPORT UTILITY SERIES

A versatile utility boat that's ready to go in minutes.



FRB-124



FRB-124

Designed originally as quick response boats for fire departments and rescue units, these unique aluminum roll up floors with an innovative hinge system and non-skid panels can perform a variety of functions. They are easy to store or carry and can be set up in minutes. The main air chambers are equipped with over pressure relief valves. They can be inflated either by compressed air bottles or the standard equipment foot pump.

In addition to their Achilles CSM fabric and four-layer seam construction, other special features like abrasion wear patches and removable storage bags make them practical alternatives for tackling a range of jobs on the water.



FRB

	FRB-104	FRB-124
Color	Red	Red
Length	10'4" (315 cm)	12'4" (375 cm)
Inside Length	7'3" (220 cm)	8'11" (272 cm)
Beam	5'2" (158 cm)	5'3" (161 cm)
Inside Beam	2'4" (72 cm)	2'6" (75 cm)
Tube Diameter	17" (43 cm)	17" (43 cm)
Weight	108 lbs (49 kg)	154 lbs (70 kg)
Load Capacity	1210 lbs (550 kg)	1480 lbs (670 kg)
Person Capacity	4	5
Recommended H.P.	10 (4-15) Standard	15 (4-25) Standard
Maximum H.P.	15 Standard	25 Standard
Air Chambers	2 + Keel	4 + Keel

FRB STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; deep "V" inflatable keel; aluminum roll-up floor with non-skid panels, fiberglass encased v-shaped transom with protective motor clamp plate; two (2) paddles with interior tie downs; two removable storage bags; full length splash guard with life lines; abrasion patches; five (5) interior tie-down D-rings; full-length teardrop rubbing strake; foot pump and maintenance kit. The FRB-104 has two (2) over pressure relief valves, four lift and carry handles, interior bow lifting D-ring and bailer valve. The FRB-124 has four (4) over pressure relief valves, six (6) lift and carry handles, two (2) bailer valves and heavy duty bailer sleeve.

SGX SPORT UTILITY SERIES

These versatile aluminum and wood-floored boats are the perfect solution for a range of uses.



SGX-122

They are rugged and roomy so they can be put to the test as dive boats, heavy duty tenders or utility boats. Their sporty nature also makes them great runabouts that really perform thanks to their deep "V" inflatable keel and large tube diameters. A range of quality features include a v-shaped fiberglass-encased transom and removable, dual position wood seat. Their Achilles CSM fabric and four-layer seam construction make these sport boats extremely tough...and tough to beat.



Courtesy of Liz Clark, Voyage of Swell



SGX-132



The aluminum floor and v-shaped fiberglass-encased transom enhance durability and performance, and decrease maintenance.

SGX

SGX-122

SGX-132

Color	Red/Gray	Red/Gray
Length	12'2" (365 cm)	13'2" (400 cm)
Inside Length	8'10" (268 cm)	9'4" (284 cm)
Beam	5'6" (168 cm)	5'9" (175 cm)
Inside Beam	2'7" (78 cm)	2'9" (85 cm)
Tube Diameter	18" (45 cm)	18" (45 cm)
Weight	167 lbs (76 kg)	187 lbs (85 kg)
Load Capacity	1,520 lbs (690 kg)	1,760 lbs (800 kg)
Person Capacity	6	6
Recommended H.P.	20 (6-35) Standard	30 (9.9-40) Long
Maximum H.P.	35 Standard	40 Long
Air Chambers	4 & Keel	4 & Keel

SGX STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; aluminum and wood floorboards with aluminum stringer system; v-shaped fiberglass encased transom; full-length teardrop rubbing strake; deep "V" inflatable keel; towing bridle D-rings; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders; bow handle; four (4) lift and carry handles; helmsman grip; two (2) bailer valves; gas tank tie downs; lifelines; removable wood seat; extra seat attachment patches; high-volume foot pump; two carry bags; and maintenance kit.

SG SPORT UTILITY SERIES

These “top-of-the-line” models continue to set the standard for inflatable sport-boats.



SG-140

Built for high performance with deep “V” trigon air keels, Achilles SG boats offer a roomy, square bow configuration which provides room for extra gear, and an aluminum and fiberglass floor system* which delivers superior rigidity and durability. Achilles SG Sportboats bring performance and practicality together for better diving, fishing, or all-around sport-boating pleasure. They are also perennial rescue and emergency boat favorites of fire departments, first responders and others around the world.



SG-140



SG	SG-124	SG-140	SG-156
Color	Red	Red	Red
Length	12'4" (375 cm)	14' (425 cm)	15'6" (473 cm)
Inside Length	8'11" (272 cm)	10' (305 cm)	10'11" (333 cm)
Beam	5'3" (161 cm)	5'9" (175 cm)	6'3" (190 cm)
Inside Beam	2'6" (75 cm)	2'9" (85 cm)	2'11" (90 cm)
Tube Diameter	17" (43 cm)	18" (45 cm)	20" (50 cm)
Weight	175 lbs (79.5 kg)	226 lbs (102.5 kg)	272 lbs (123.5 kg)
Load Capacity	1,460 lbs (660 kg)	1,940 lbs (880 kg)	2,800 lbs (1,270 kg)
Person Capacity	5	6	8
Recommended H.P.	20 (6-35) Standard	30 (9.9-50) Long	35 (9.9-55) Long
Maximum H.P.	35 Standard	50 Long	55 Long
Air Chambers	4 & Keel	4 & Keel	5 & Keel

SG STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; trigon air keel; aluminum and fiberglass* floorboards with aluminum stringer system; fiberglass encased transom with protective motor clamp plate; fuel tank tie-downs; two (2) bailer valves; full-length teardrop rubbing strake; fold-down locking oar system with two-piece breakdown aluminum oars and oar holders (except SG-156); bow carry handle; lift and carry handles; towing bridle D-rings; helmsman grip; full-length splash guard with life lines; removable wood seat (except SG-156); extra seat attachment patches; large, high-volume foot pump; double carry bag system; and maintenance kit.

*SG-124 floorboards are aluminum and wood.

SU SPORT UTILITY SERIES

SU Boats are built tough to work hard for rugged private and commercial use.



SEAT, CONSOLE AND ARCH SHOWN ARE CUSTOM DEALER OPTIONS*



SU-16

They are made with an additional heavy-duty layer of 840-denier nylon Achilles CSM fabric in a two-ply technique which results in a fabric even stronger than a single base fabric of equal thickness. A number of commercial grade features such as recessed valves and a full-length, protective wear patch combine to make these boats the right choice for the toughest marine uses.



SU-16



Heavy-duty bailer and aluminum-plated transom



SU

	SU-14	SU-16	SU-18
Color	Gray, Black*	Gray, Black*	Gray, Black*
Length	14' (425 cm)	16' (488 cm)	18' (549 cm)
Inside Length	9'4" (284 cm)	10'10" (330 cm)	12' (366 cm)
Beam	5'10" (178 cm)	6'9" (206 cm)	7'7" (230 cm)
Inside Beam	2'8" (82 cm)	3'3" (100 cm)	3'7" (110 cm)
Tube Diameter	19" (48 cm)	21" (53 cm)	24" (60 cm)
Weight	280 lbs (127 kg)	371 lbs (168.5 kg)	433 lbs (196 kg)
Load Capacity	2,230 lbs (1,010 kg)	3,170 lbs (1,440 kg)	4,630 lbs (2,100 kg)
Person Capacity	6	9	11
Recommended H.P.	35 (9.9 -55) Long	40 (20-75) Long	50 (25-90) Long
Maximum H.P.	55 Long	75 Long	90 Long
Air Chambers	4 & Keel	5 & Keel	5 & Keel

*International Orange available as special order only

SU STANDARD FEATURES INCLUDE: Achilles CSM reinforced fabric; four-layer seam construction; extra durable double layer (840 denier each) nylon core fabric; trigon air keel; aluminum and fiberglass floorboards and heavy duty aluminum stringer system; fiberglass encased transom with aluminum plate and motor pad; fuel tank tie-downs; heavy duty bailer sleeve and two (2) bailer valves; extra-wide, heavy-duty, full-length teardrop rubbing strake; tie-down straps for paddles; bow handle; towing bridle D-rings; lift and carry handles; splash guard with life lines; heavy-duty reinforced cargo wear patch all around; extra tie-down D-rings; heavy duty recessed valves; heavy duty lifting points (hull and transom); two (2) high-volume large foot pumps; and maintenance kit.

MODEL	LENGTH	INSIDE LENGTH	BEAM	INSIDE BEAM	TUBE	HP RATING (RECOMMENDED/RANGE)	MAX ENGINE WEIGHT	HULL WEIGHT
-------	--------	---------------	------	-------------	------	-------------------------------	-------------------	-------------

DINGHY & TENDER BOATS PAGES 3-4

LT-2	7'3" (220 cm)	5' (153 cm)	4'1" (124 cm)	1'11" (58 cm)	13" (33 cm)	3 (2-3) standard	44 lbs 20 kg	29 lbs 13 kg
LT-4	8'6" (260 cm)	6'2" (188 cm)	4'8" (142 cm)	2'2" (66 cm)	15" (38 cm)	3 (2-3) standard	44 lbs 20 kg	37 lbs 17 kg
LS2-RU	7'6" (228 cm)	5'1" (156 cm)	4'4" (132 cm)	2' (62 cm)	14" (35 cm)	4 (2-4) standard	55 lbs 25 kg	40 lbs 18 kg
LS4-RU	8'8" (265 cm)	6'1" (185 cm)	4'8" (142 cm)	2'2" (66 cm)	15" (38 cm)	4 (2-6) standard	66 lbs 30 kg	46 lbs 21 kg

SPORT TENDER BOATS PAGES 5-9

LEX-77	7'7" (230 cm)	4'11" (149 cm)	4'9" (144 cm)	2'2" (66 cm)	15.5" (39 cm)	4 (2-4) standard	55 lbs 25 kg	45 lbs 20.5 kg
LEX-88	8'8" (265 cm)	5'11" (180 cm)	4'9" (144 cm)	2'2" (66 cm)	15.5" (39 cm)	4 (2-6) standard	66 lbs 30 kg	49 lbs 22 kg
LEX-96	9'6" (290 cm)	6'9" (205 cm)	4'9" (144 cm)	2'2" (66 cm)	15.5" (39 cm)	6 (4-8) standard	88 lbs 40 kg	52 lbs 23.5 kg
LSR-290	9'6" (290 cm)	6'9" (205 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	6 (4-8) standard	88 lbs 40 kg	64 lbs 29 kg
LSR-310	10'2" (310 cm)	7'3" (220 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	8 (4-10) standard	110 lbs 50 kg	68 lbs 31 kg
LSI-230E	7'7" (230 cm)	5'1" (155 cm)	4'9" (144 cm)	2'2" (66 cm)	15.5" (39 cm)	4 (2 - 4) standard	55 lbs 25 kg	44 lbs 20 kg
LSI-260E	8'6" (260 cm)	6'1" (185 cm)	4'9" (144 cm)	2'2" (66 cm)	15.5" (39 cm)	4 (2 - 6) standard	66 lbs 30 kg	55 lbs 25 kg
LSI-290E	9'6" (290 cm)	6'9" (205 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	6 (4 - 8) standard	88 lbs 40 kg	66 lbs 30 kg
LSI-310E	10'2" (310 cm)	7'3" (220 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	8 (4 - 10) standard	110 lbs 50 kg	68 lbs 31 kg
LSI-330E	10'8" (325 cm)	7'5" (226 cm)	5'6" (168 cm)	2'7" (78 cm)	18" (45 cm)	10 (4 - 15) standard	110 lbs 50 kg	73 lbs 33 kg
LSI-360E	11'10" (360 cm)	8'10" (268 cm)	5'6" (168 cm)	2'7" (78 cm)	18" (45 cm)	20 (4 - 25) standard	154 lbs 70 kg	86 lbs 39 kg
SPD-290E	9'6" (290 cm)	6'9" (205 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	6 (4 - 8) standard	88 lbs 40 kg	66 lbs 30 kg
SPD-310E	10'2" (310 cm)	7'3" (220 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	8 (4 - 10) standard	110 lbs 50 kg	68 lbs 31 kg
SPD-330E	10'8" (325 cm)	7'5" (226 cm)	5'6" (168 cm)	2'7" (78 cm)	18" (45 cm)	15 (6 - 20) standard	121 lbs 55 kg	73 lbs 33 kg

RIGID HULL BOATS PAGES 10-12

HB270-FX	8'10" (270 cm)	5'11" (180 cm)	5'1" (156 cm)	2'3" (70 cm)	17" (43 cm)	6 (4 - 8) standard	88 lbs 40 kg	86 lbs 39 kg
HB300-FX	9'10" (300 cm)	6'9" (205 cm)	5'4" (162 cm)	2'4" (72 cm)	18" (45 cm)	8 (4 - 10) standard	110 lbs 50 kg	91 lbs 41.5 kg
HB240-LX	7'10" (240 cm)	5'8" (172 cm)	5' (153 cm)	2'5" (73 cm)	16" (40 cm)	5 (2 - 5) standard	66 lbs 30 kg	86 lbs 39 kg
HB280-LX	9'2" (280 cm)	6'7" (201 cm)	5'5" (166 cm)	2'7" (80 cm)	17" (43 cm)	8 (4 - 10) standard	110 lbs 50 kg	118 lbs 53.5 kg
HB315-LX	10'4" (315 cm)	7'9" (235 cm)	5'5" (166 cm)	2'7" (80 cm)	17" (43 cm)	10 (4 - 15) standard	110 lbs 50 kg	128 lbs 58 kg
HB350-LX	11'6" (350 cm)	8'8" (264 cm)	5'9" (175 cm)	2'9" (85 cm)	18" (45 cm)	15 (6 - 20) standard	121 lbs 55 kg	161 lbs 73 kg
HB280-DX	9'2" (280 cm)	6'7" (201 cm)	5'5" (166 cm)	2'7" (80 cm)	17" (43 cm)	10 (4 - 15**) standard	110 lbs 50 kg	148 lbs 67 kg
HB315-DX	10'4" (315 cm)	7'9" (235 cm)	5'5" (166 cm)	2'7" (80 cm)	17" (43 cm)	15 (6 - 20) standard	121 lbs 55 kg	159 lbs 72 kg
HB350-DX	11'6" (350 cm)	8'8" (264 cm)	5'9" (175 cm)	2'9" (85 cm)	18" (45 cm)	20 (6 - 30) long	172 lbs 78 kg	187 lbs 85 kg
HB385-DX	12'8" (385 cm)	9'10" (300 cm)	5'11" (180 cm)	2'11" (90 cm)	18" (45 cm)	30 (20 - 40) long	209 lbs 95 kg	243 lbs 110 kg

SPORT & UTILITY BOATS PAGES 13-16

FRB-104	10'4" (315 cm)	7'3" (220 cm)	5'2" (158 cm)	2'4" (72 cm)	17" (43 cm)	10 (4 - 15) standard	110 lbs 50 kg	75 lbs 34 kg
FRB-124	12'4" (375 cm)	8'11" (272 cm)	5'3" (161 cm)	2'6" (75 cm)	17" (43 cm)	15 (4 - 25) standard	154 lbs 70 kg	108 lbs 49 kg
SGX-122	12'2" (365 cm)	8'10" (268 cm)	5'6" (168 cm)	2'7" (78 cm)	18" (45 cm)	20 (6 - 35) standard	176 lbs 80 kg	99 lbs 45 kg
SGX-132	13'2" (400 cm)	9'4" (284 cm)	5'9" (175 cm)	2'9" (85 cm)	18" (45 cm)	30 (9.9 - 40) long	209 lbs 95 kg	112 lbs 51 kg
SG-124	12'4" (375 cm)	8'11" (272 cm)	5'3" (161 cm)	2'6" (75 cm)	17" (43 cm)	20 (6 - 35) standard	176 lbs 80 kg	106 lbs 48 kg
SG-140	14' (425 cm)	10' (305 cm)	5'9" (175 cm)	2'9" (85 cm)	18" (45 cm)	30 (9.9 - 50) long	243 lbs 110 kg	122 lbs 55.5 kg
SG-156	15'6" (473 cm)	10'11" (333 cm)	6'3" (190 cm)	2'11" (90 cm)	20" (50 cm)	35 (9.9 - 55) long	265 lbs 120 kg	151 lbs 68.5 kg
SU-14	14' (425 cm)	9'4" (284 cm)	5'10" (178 cm)	2'8" (82 cm)	19" (48 cm)	35 (9.9 - 55) long	265 lbs 120 kg	172 lbs 78 kg
SU-16	16' (488 cm)	10'10" (330 cm)	6'9" (206 cm)	3'3" (100 cm)	21" (53 cm)	40 (20 - 75) long	353 lbs 160 kg	231 lbs 105 kg
SU-18	18' (549 cm)	12' (366 cm)	7'7" (230 cm)	3'7" (110 cm)	24" (60 cm)	50 (25 - 90) long	375 lbs 170 kg	265 lbs 120 kg

The maximum HP Rating, Person Capacity and Load Capacity have been calculated according to the standards of ISO6185.

*3 Person Capacity according to NMMA Certification Standards. Persons operating boats alone should exercise caution when using maximum HP engines.

**15 H.P. Max. with Remote Steering; 10 H.P. with tiller steering

2014 ACHILLES BOATS

FLOOR WEIGHT		BOAT WEIGHT		ACCESSORIES WEIGHT		TOTAL WEIGHT		LOAD CAPACITY		PERSON CAPACITY	NO. AIR CHAMBERS	STOWED DIMENSIONS	
8 lbs	3.5 kg	37 lbs	16.5 kg	12 lbs	5.5 kg	49 lbs	22 kg	640 lbs	290 kg	2	2	3'3" x 1'6" x 9"	(100 x 46 x 24)
20 lbs	9 kg	57 lbs	26 kg	17 lbs	7.5 kg	74 lbs	33.5 kg	970 lbs	440 kg	4*	2	3'5" x 1'10" x 10"	(103 x 55 x 26)
17 lbs	7.5 kg	57 lbs	25.5 kg	12 lbs	5.5 kg	69 lbs	31 kg	620 lbs	280 kg	2	2	3'5" x 1'10" x 10"	(103 x 55 x 26)
20 lbs	9 kg	66 lbs	30 kg	12 lbs	5.5 kg	78 lbs	35.5 kg	840 lbs	380 kg	4*	2	3'5" x 1'10" x 10"	(103 x 55 x 26)
17 lbs	7.5 kg	62 lbs	28 kg	15 lbs	7 kg	77 lbs	35 kg	730 lbs	330 kg	2	2 & keel	3'5" x 1'8" x 11"	(105 x 52 x 28)
20 lbs	9 kg	69 lbs	31 kg	12 lbs	5.5 kg	81 lbs	36.5 kg	900 lbs	410 kg	4*	2 & keel	3'4" x 1'11" x 10"	(102 x 59 x 25)
22 lbs	10 kg	74 lbs	33.5 kg	12 lbs	5.5 kg	86 lbs	39 kg	990 lbs	450 kg	4	2 & keel	3'5" x 2'1" x 10"	(105 x 63 x 26)
31 lbs	14 kg	95 lbs	43 kg	19 lbs	8.5 kg	114 lbs	51.5 kg	1210 lbs	550 kg	4	2 & keel	3'9" x 2'1" x 1'3"	(115 x 63 x 39)
33 lbs	15 kg	101 lbs	46 kg	19 lbs	8.5 kg	120 lbs	54.5 kg	1300 lbs	590 kg	4	2 & keel	3'9" x 2'1" x 1'3"	(115 x 63 x 39)
8 lbs	3.5 kg	52 lbs	23.5 kg	17 lbs	7.5 kg	68 lbs	31 kg	710 lbs	320 kg	2	2 & floor	3'5" x 1'10" x 11"	(105 x 55 x 27)
9 lbs	4 kg	64 lbs	29 kg	17 lbs	7.5 kg	80 lbs	36.5 kg	820 lbs	370 kg	4*	2 & keel & floor	3'5" x 1'10" x 11"	(105 x 55 x 28)
11 lbs	5 kg	77 lbs	35 kg	18 lbs	8 kg	95 lbs	43 kg	1120 lbs	510 kg	4	2 & keel & floor	3'9" x 1'10" x 1'	(115 x 55 x 30)
12 lbs	5.5 kg	80 lbs	36.5 kg	18 lbs	8 kg	98 lbs	44.5 kg	1210 lbs	550 kg	4	3 & keel & floor	4'2" x 1'11" x 1'	(128 x 58 x 30)
13 lbs	6 kg	86 lbs	39 kg	18 lbs	8 kg	104 lbs	47 kg	1340 lbs	610 kg	5	3 & keel & floor	4'1" x 1'11" x 10"	(125 x 58 x 26)
22 lbs	10 kg	108 lbs	49 kg	18 lbs	8 kg	126 lbs	57 kg	1520 lbs	690 kg	6	4 & keel & floor	4'2" x 2' x 1'2"	(128 x 60 x 35)
40 lbs	18 kg	106 lbs	48 kg	18 lbs	8 kg	123 lbs	56 kg	1100 lbs	500 kg	4	2 & keel	3'9" x 1'8" x 1'1"	(115 x 52 x 34)
42 lbs	19 kg	110 lbs	50 kg	18 lbs	8 kg	128 lbs	58 kg	1190 lbs	540 kg	4	3 & keel	3'9" x 1'11" x 1'1"	(115 x 58 x 34)
47 lbs	21.5 kg	120 lbs	54.5 kg	19 lbs	8.5 kg	139 lbs	63 kg	1300 lbs	590 kg	5	3 & keel	B - 4'1" x 1'11" x 10" F - 3'2" x 1'10" x 5"	(125 x 58 x 26) (97 x 56 x 13)
—	—	86 lbs	39 kg	17 lbs	7.5 kg	103 lbs.	46.5 kg	1010 lbs	460 kg	4	3	6'11" x 3'5" x 1'1"	(210 x 105 x 33)
—	—	91 lbs	41.5 kg	17 lbs	7.5 kg	108 lbs.	49 kg	1260 lbs	570 kg	4	3	7'9" x 3'5" x 1'1"	(235 x 105 x 33)
—	—	86 lbs	39 kg	11 lbs	5 kg	97 lbs.	44 kg	900 lbs	410 kg	3	2	7'5" x 3'5" x 1'6"	(225 x 105 x 46)
—	—	118 lbs	53.5 kg	12 lbs	5.5 kg	130 lbs.	59 kg	1210 lbs	550 kg	4	3	8'8" x 3'5" x 1'6"	(265 x 105 x 46)
—	—	128 lbs	58 kg	12 lbs	5.5 kg	140 lbs.	63.5 kg	1320 lbs	600 kg	5	3	9'8" x 3'5" x 1'6"	(295 x 105 x 46)
—	—	161 lbs	73 kg	13 lbs	6 kg	174 lbs.	79 kg	1680 lbs	760 kg	6	3	10'10" x 3'7" x 1'8"	(330 x 110 x 51)
—	—	148 lbs	67 kg	12 lbs	5.5 kg	160 lbs.	72.5 kg	1190 lbs	540 kg	4	3	8'8" x 3'5" x 1'6"	(265 x 105 x 46)
—	—	159 lbs	72 kg	12 lbs	5.5 kg	171 lbs.	77.5 kg	1300 lbs	590 kg	5	3	9'8" x 3'5" x 1'6"	(295 x 105 x 46)
—	—	187 lbs	85 kg	13 lbs	6 kg	200 lbs.	91 kg	1650 lbs	750 kg	6	3	10'10" x 3'7" x 2'1"	(330 x 110 x 63)
—	—	243 lbs	110 kg	13 lbs	6 kg	256 lbs.	116 kg	1790 lbs	810 kg	7	4	11'10" x 3'11" x 2'2"	(360 x 120 x 65)
33 lbs	15 kg	108 lbs	49 kg	20 lbs	9 kg	128 lbs	58 kg	1210 lbs	550 kg	4	2 & keel	4'1" x 2'1" x 1'3"	(125 x 63 x 39)
46 lbs	21 kg	154 lbs	70 kg	20 lbs	9 kg	174 lbs	79 kg	1480 lbs	670 kg	5	4 & keel	4'5" x 2'6" x 2'	(135 x 75 x 60)
68 lbs	31 kg	167 lbs	76 kg	21 lbs	9.5 kg	188 lbs	85.5 kg	1520 lbs	690 kg	6	4 & keel	B - 4'2" x 2' x 1' F - 3'1" x 2'2" x 7"	(128 x 60 x 30) (93 x 67 x 17)
75 lbs	34 kg	187 lbs	85 kg	25 lbs	11.5 kg	212 lbs	96.5 kg	1760 lbs	800 kg	6	4 & keel	B - 4'3" x 2' x 1'2" F - 3'5" x 2'5" x 7"	(130 x 61 x 35) (105 x 74 x 17)
69 lbs	31.5 kg	175 lbs	79.5 kg	20 lbs	9 kg	195 lbs	88.5 kg	1460 lbs	660 kg	5	4 & keel	B - 4'1" x 2'2" x 1'2" F - 3'1" x 2'2" x 6"	(125 x 67 x 36) (93 x 67 x 16)
104 lbs	47 kg	226 lbs	102.5 kg	20 lbs	9 kg	246 lbs	111.5 kg	1940 lbs	880 kg	6	4 & keel	B - 4'6" x 2'2" x 1'2" F - 3'5" x 2'6" x 8"	(137 x 67 x 36) (104 x 75 x 20)
121 lbs	55 kg	272 lbs	123.5 kg	15 lbs	7 kg	287 lbs	130.5 kg	2800 lbs	1270 kg	8	5 & keel	B - 5' x 2'4" x 1'2" F - 3'7" x 2'6" x 8"	(152 x 71 x 36) (110 x 76 x 20)
108 lbs	49 kg	280 lbs	127 kg	7 lbs	3 kg	287 lbs	130 kg	2230 lbs	1010 kg	6	4 & keel	B - 5'4" x 2'5" x 1'5" F - 3'4" x 2'6" x 8"	(162 x 74 x 42) (101 x 75 x 20)
140 lbs.	63.5 kg	371 lbs	168.5 kg	7 lbs	3 kg	378 lbs	171.5 kg	3170 lbs	1440 kg	9	5 & keel	B - 5'10" x 2'10" x 1'4" F - 3'11" x 2'9" x 8"	(178 x 87 x 40) (120 x 85 x 20)
168 lbs	76 kg	433 lbs	196 kg	7 lbs	3 kg	440 lbs	199 kg	4630 lbs	2100 kg	11	5 & keel	B - 6'3" x 3'3" x 1'4" F - 4'4" x 3'1" x 8"	(190 x 98 x 40) (133 x 95 x 20)



ACHILLES INFLATABLE BOATS

A Division of Achilles USA, Inc.

1407 80th Street SW
Everett, WA 98203
Email: boats@achillesusa.com
www.achillesboats.com

EAST COAST SALES OFFICE:
(252) 288-4387

WEST COAST SALES OFFICE:
(951) 587-8101

MANUFACTURED BY:
Achilles Corporation
No. 22 Daikyo-Cho, Shinjuku-Ku
Tokyo, Japan 160-8885
Phone: (03) 3225-2187
Fax: (03) 3351-6963



EUROPEAN AGENT:
Wendt Agenturen B.V.
Achter de Watertoren 11
2182 DV Hillegom
The Netherlands
Phone: +31 (0) 252 516 938
Fax: +31 (0) 252 830 256
Email: info@achilles-wendt.com

NORWAY DISTRIBUTOR:
AS Kellox
Nygårdsveien 67
N-1401 Ski
Norway
Phone: (47) 64 97 61 00
Fax: (47) 64 97 6190
Email: achilles@kellox.no

SWEDEN/DENMARK/FINLAND/DISTRIBUTOR:
Loxkel AS
PO Box 113
N-1401 Ski
Norway
Phone: (47) 64 97 61 80
Fax: (47) 64 97 6190
Email: achilles@loxkel.no



AUSTRALIAN DISTRIBUTOR:
BURSILL SPORTSGEAR
(Holdings) Pty. Ltd.
16 Vine Street
Redfern N.S.W. 2016
Australia
Phone: (61) 2 9698 8022
Fax: (61) 2 9698 5708
Email: grahambursill@bigpond.com
www.inflatableboats.com.au



Visit us on Facebook

facebook.com/Achilles.Inflatable.Boats

*Specifications of Achilles boats may change without notice. Always follow manufacturer's recommendations for boats and engines.
Achilles recommends the use of a personal flotation device or life jacket when boating.*